

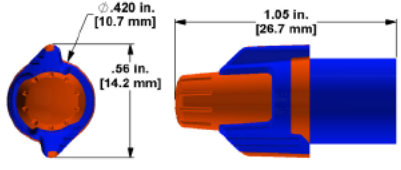


		<b>Twister® ProfFLEX™ Mini WIRE CONNECTOR</b>	<b>MODEL 343</b>												
<b>FEATURES/BENEFITS:</b>															
		<ul style="list-style-type: none"> <li>• SWEEP WING DESIGN PROVIDES EXTRA LEVERAGE FOR MAXIMUM TORQUE</li> <li>• WIDE RANGE, EXPANDING SPRING HANDLES SMALL COMBINATIONS AND EXPANDS TO ACCOMMODATE LARGE COMBINATIONS WHEN YOU NEED IT</li> <li>• COPOLYMER SHELL EXPANDS FOR SMOOTH, PROGRESSIVE TIGHTENING ENSURING DEPENDABLE CONNECTIONS</li> <li>• FLEXIBLE SKIRT INCREASES PROTECTION WITHOUT REQUIRING ADDED SPACE IN TIGHT BOXES</li> </ul>													
<b>ELECTRICAL:</b>		<b>APPLICATION TOOLS:</b>													
VOLTAGE: GENERAL: 600 V MAX* *1000V MAX IN FIXTURES AND SIGNS		SPIN-TWIST WIRE CONNECTOR SOCKET													
<b>PHYSICAL:</b>		<b>STANDARDS &amp; SPECIFICATIONS:</b>													
HOUSING: THERMOPLASTIC POLYPROPYLENE WITH THERMOPLASTIC ELASTOMER INSERT: STEEL PLATING: ZINC TEMPERATURE: 105° C (221° F)		UL 486 C UL 94V-2 FLAME RETARDANT SHELL CUL LISTED TO CSA C22.2 No. 188-8 RoHS COMPLIANT													
		Made in U.S.A.  of US and global components													
<b>WIRE RANGE &amp; COMBINATIONS:</b>		- Solid and/or stranded wire combinations unless stated otherwise - Consult website for other combinations not listed													
STRIP LENGTH: 7/16" (11 mm). For capping off single 14, 12 or 10 AWG conductors, strip wires: 1/4"															
<table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; vertical-align: top;">                     2 to 6 - # 22 AWG                       2 to 6 - # 20 AWG                       2 to 5 - # 18 AWG                       2 to 4 - # 16 AWG                       1 to 3 - # 14 AWG                       1 to 3 - # 12 AWG                       4 - # 12 AWG SOLID                       1 - # 10 AWG                       3 - # 20 AWG with 1 or 2 - # 22 AWG                       4 - # 20 AWG with 1 - # 22 AWG                       1 - # 18 AWG with 1 to 4 - # 20 AWG or # 22 AWG                       2 - # 18 AWG with 1 to 3 - # 20 AWG or # 22 AWG                       3 - # 18 AWG with 1 or 2 - # 20 AWG or # 22 AWG                 </td> <td style="width: 33%; vertical-align: top;">                     4 - # 18 AWG with 1 - # 20 AWG or # 22 AWG                       1 - # 16 AWG with 1 to 4 - # 20 AWG or # 22 AWG                       1 - # 16 AWG with 1 to 5 - # 18 AWG                       2 - # 16 AWG with 1 to 3 - # 22 AWG                       2 - # 16 AWG with 1 to 3 - # 20 AWG                       2 - # 16 AWG with 1 to 4 - # 18 AWG                       3 - # 16 AWG with 1 to 3 - # 18 AWG or # 20 AWG or # 22 AWG                       4 - # 16 AWG with 1 - # 20 AWG or # 22 AWG                       4 - # 16 AWG with 1 or 2 - # 18 AWG                       1 - # 14 AWG with 1 to 4 - # 22 AWG                       1 - # 14 AWG with 1 to 3 - # 20 AWG                       1 - # 14 AWG with 1 to 5 - # 18 AWG                       1 - # 14 AWG with 1 to 4 - # 16 AWG                       2 - # 14 AWG with 1 to 3 - # 20 AWG or # 22 AWG                 </td> <td style="width: 33%; vertical-align: top;">                     2 - # 14 AWG with 1 to 3 - # 18 AWG                       2 - # 14 AWG with 1 to 3 - # 16 AWG                       3 - # 14 AWG with 1 or 2 - # 18 AWG                       3 - # 14 AWG with 1 - # 16 AWG                       1 - # 12 AWG with 1 to 5 - # 18 AWG                       1 - # 12 AWG with 1 to 3 - # 16 AWG                       1 - # 12 AWG with 1 or 2 - # 14 AWG                       2 - # 12 AWG with 1 or 2 - # 18 AWG                       2 - # 12 AWG with 1 - # 16 AWG                       2 - # 12 AWG with 1 - # 14 AWG                       1 - # 10 AWG with 1 to 3 - # 18 AWG                       1 - # 10 AWG with 1 or 2 - # 16 AWG                       1 - # 10 AWG with 1 or 2 - # 14 AWG                       1 - # 10 AWG with 1 - # 12 AWG                 </td> </tr> </table>				2 to 6 - # 22 AWG  2 to 6 - # 20 AWG  2 to 5 - # 18 AWG  2 to 4 - # 16 AWG  1 to 3 - # 14 AWG  1 to 3 - # 12 AWG  4 - # 12 AWG SOLID  1 - # 10 AWG  3 - # 20 AWG with 1 or 2 - # 22 AWG  4 - # 20 AWG with 1 - # 22 AWG  1 - # 18 AWG with 1 to 4 - # 20 AWG or # 22 AWG  2 - # 18 AWG with 1 to 3 - # 20 AWG or # 22 AWG  3 - # 18 AWG with 1 or 2 - # 20 AWG or # 22 AWG	4 - # 18 AWG with 1 - # 20 AWG or # 22 AWG  1 - # 16 AWG with 1 to 4 - # 20 AWG or # 22 AWG  1 - # 16 AWG with 1 to 5 - # 18 AWG  2 - # 16 AWG with 1 to 3 - # 22 AWG  2 - # 16 AWG with 1 to 3 - # 20 AWG  2 - # 16 AWG with 1 to 4 - # 18 AWG  3 - # 16 AWG with 1 to 3 - # 18 AWG or # 20 AWG or # 22 AWG  4 - # 16 AWG with 1 - # 20 AWG or # 22 AWG  4 - # 16 AWG with 1 or 2 - # 18 AWG  1 - # 14 AWG with 1 to 4 - # 22 AWG  1 - # 14 AWG with 1 to 3 - # 20 AWG  1 - # 14 AWG with 1 to 5 - # 18 AWG  1 - # 14 AWG with 1 to 4 - # 16 AWG  2 - # 14 AWG with 1 to 3 - # 20 AWG or # 22 AWG	2 - # 14 AWG with 1 to 3 - # 18 AWG  2 - # 14 AWG with 1 to 3 - # 16 AWG  3 - # 14 AWG with 1 or 2 - # 18 AWG  3 - # 14 AWG with 1 - # 16 AWG  1 - # 12 AWG with 1 to 5 - # 18 AWG  1 - # 12 AWG with 1 to 3 - # 16 AWG  1 - # 12 AWG with 1 or 2 - # 14 AWG  2 - # 12 AWG with 1 or 2 - # 18 AWG  2 - # 12 AWG with 1 - # 16 AWG  2 - # 12 AWG with 1 - # 14 AWG  1 - # 10 AWG with 1 to 3 - # 18 AWG  1 - # 10 AWG with 1 or 2 - # 16 AWG  1 - # 10 AWG with 1 or 2 - # 14 AWG  1 - # 10 AWG with 1 - # 12 AWG									
2 to 6 - # 22 AWG  2 to 6 - # 20 AWG  2 to 5 - # 18 AWG  2 to 4 - # 16 AWG  1 to 3 - # 14 AWG  1 to 3 - # 12 AWG  4 - # 12 AWG SOLID  1 - # 10 AWG  3 - # 20 AWG with 1 or 2 - # 22 AWG  4 - # 20 AWG with 1 - # 22 AWG  1 - # 18 AWG with 1 to 4 - # 20 AWG or # 22 AWG  2 - # 18 AWG with 1 to 3 - # 20 AWG or # 22 AWG  3 - # 18 AWG with 1 or 2 - # 20 AWG or # 22 AWG	4 - # 18 AWG with 1 - # 20 AWG or # 22 AWG  1 - # 16 AWG with 1 to 4 - # 20 AWG or # 22 AWG  1 - # 16 AWG with 1 to 5 - # 18 AWG  2 - # 16 AWG with 1 to 3 - # 22 AWG  2 - # 16 AWG with 1 to 3 - # 20 AWG  2 - # 16 AWG with 1 to 4 - # 18 AWG  3 - # 16 AWG with 1 to 3 - # 18 AWG or # 20 AWG or # 22 AWG  4 - # 16 AWG with 1 - # 20 AWG or # 22 AWG  4 - # 16 AWG with 1 or 2 - # 18 AWG  1 - # 14 AWG with 1 to 4 - # 22 AWG  1 - # 14 AWG with 1 to 3 - # 20 AWG  1 - # 14 AWG with 1 to 5 - # 18 AWG  1 - # 14 AWG with 1 to 4 - # 16 AWG  2 - # 14 AWG with 1 to 3 - # 20 AWG or # 22 AWG	2 - # 14 AWG with 1 to 3 - # 18 AWG  2 - # 14 AWG with 1 to 3 - # 16 AWG  3 - # 14 AWG with 1 or 2 - # 18 AWG  3 - # 14 AWG with 1 - # 16 AWG  1 - # 12 AWG with 1 to 5 - # 18 AWG  1 - # 12 AWG with 1 to 3 - # 16 AWG  1 - # 12 AWG with 1 or 2 - # 14 AWG  2 - # 12 AWG with 1 or 2 - # 18 AWG  2 - # 12 AWG with 1 - # 16 AWG  2 - # 12 AWG with 1 - # 14 AWG  1 - # 10 AWG with 1 to 3 - # 18 AWG  1 - # 10 AWG with 1 or 2 - # 16 AWG  1 - # 10 AWG with 1 or 2 - # 14 AWG  1 - # 10 AWG with 1 - # 12 AWG													
<b>DIMENSIONS:</b>		<b>ORDERING INFORMATION:</b>													
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 33%;">QUANTITY</th> <th style="width: 33%;">CAT. NO.</th> <th style="width: 33%;">WEIGHT (lbs)</th> </tr> </thead> <tbody> <tr> <td>BOX OF 100</td> <td>30-343</td> <td>0.3</td> </tr> <tr> <td>JAR OF 500</td> <td>30-643J</td> <td>1.6</td> </tr> <tr> <td>BARREL OF 35,000</td> <td>30-843</td> <td>89.6</td> </tr> </tbody> </table>		QUANTITY	CAT. NO.	WEIGHT (lbs)	BOX OF 100	30-343	0.3	JAR OF 500	30-643J	1.6	BARREL OF 35,000	30-843	89.6
		QUANTITY	CAT. NO.	WEIGHT (lbs)											
		BOX OF 100	30-343	0.3											
		JAR OF 500	30-643J	1.6											
BARREL OF 35,000	30-843	89.6													
		<i>Revision: January 2021</i>													