




Premium Refrigerant Charging Hoses

With SafeMate™ Valves

DESCRIPTION

A convenient three pack of 1/4" patented 5 ft barrier hoses in red, yellow and blue for safely and efficiently charging, recovering and evacuating H/CFC, HFC, HFO, plus R410a, R134a and R12234yf refrigerants in residential and commercial HVAC/R systems.

- Each hose features a patented, "T" shaped, "SafeMate" valve and fitting on one end, and an open, straight fitting on the other.
- The T-shaped SafeMate valve has a screw down core depressor that activates refrigerant flow *after* the knurled brass fitting has been fully tightened onto a service port. This **protects technicians hands from frostbite and prevents refrigerant from escaping into the atmosphere.**
- Once attached, the innovative T valve swivels *above* the brass nut so it won't loosen if a hose is moved during charging, recovery or evacuation procedures.
- Barrier Lining- Minimizes refrigerant loss vs conventional hoses.

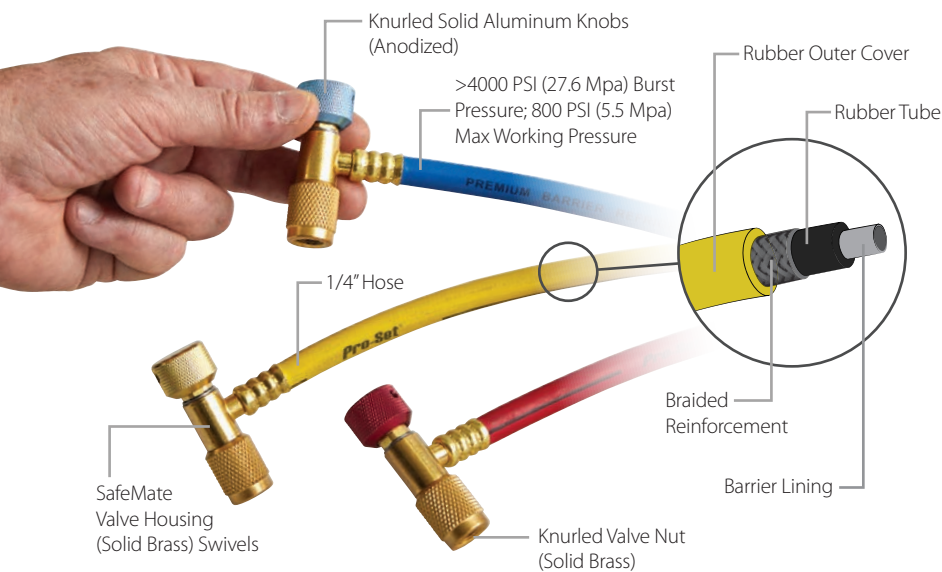

	#HP5NG	#HK5NG	#HJ5NG
T Shaped SafeMate Fitting	1/4"	5/16"	5/16"
Straight Fitting*	1/4"	1/4"	5/16"

*All Fittings Are SAE Female


Header Card (In English, French, Spanish and German)



Front




Rear
(Specifications)

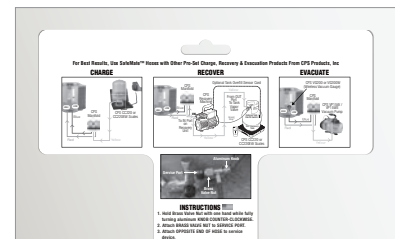

Reverse Side
(Instructions)




Pro-Set® Refrigerant Charging Hoses With SafeMate™ Valves

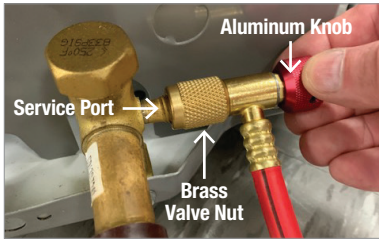


INSTRUCTIONS

1. Hold knurled BRASS NUT while turning ALUMINUM KNOB COUNTER-CLOCKWISE until it stops.
2. Attach BRASS VALVE NUT to SERVICE PORT.
3. Attach OPPOSITE END OF HOSE to service device.
4. Turn aluminum KNOB CLOCKWISE to start FLOW.

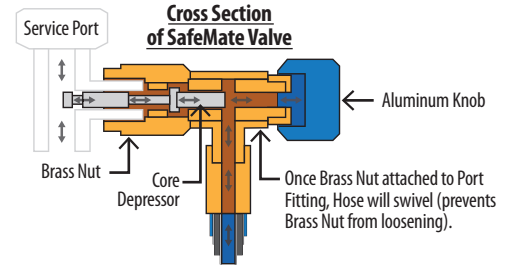


Multi-Language Instructions On Header Card Reverse Side


CHARGE

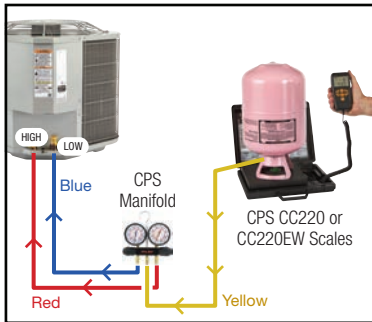

RECOVER

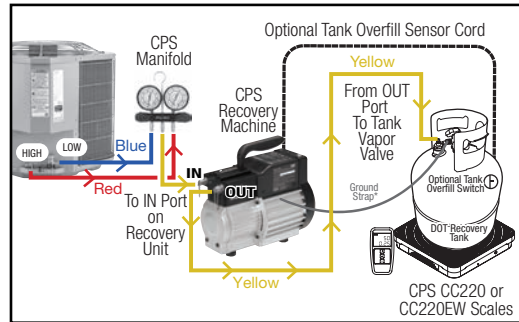

EVACUATE

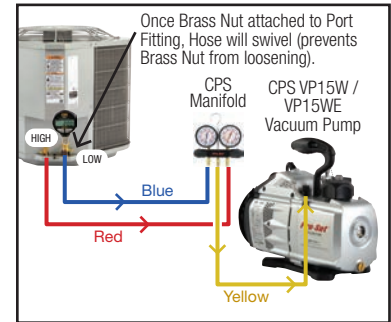

HOSE SPECIFICATIONS

	#HP5NG	#HK5NG	#HJ5NG
Description	3 Pack, 5 Ft (1.5 m) Red, Yellow, Blue Premium Hose Set		
Straight Fitting (Solid Brass, Aluminum Knob)	1/4" SAE Female	1/4" SAE Female	5/16" Female
SafeMate Fitting (Solid Brass, Aluminum Knob)	1/4" SAE Female	5/16" SAE Female	5/16" SAE Female
Construction Layers	Barrier/Tube/Reinforcement/Cover		
Hose Size	1/4"		
Hose Permeation Rate	≤1.01 Lbs/SqFt/Year (≤4.9 Kg/m2/Year)		
Burst Pressure	≥4000 psi (27.6 Mpa)		
Maximum Working Pressure	800 psi (5.51 Mpa)		
Hose Colors	Red, Yellow, Blue		
Tensile Pull (Per SAE J2196 and SAE J2888)	Minimum pull force to separate hose from coupling: 120 Lbs (≥534 N)		
Refrigerant Compatibility	CFC, H/CFC, HFC, HFO & R410a, R134a, R1234yf		
Patents	Taiwan: #1637133; Japan: #640222; China: #201710540651		

PACKAGING SPECIFICATIONS

	#HP5NG	#HK5NG	#HJ5NG
3 Pack Size (With Hoses)	14.75" x 10" x 1.5" (375 x 254 x 38 mm)		
3 Pack Hoses (Weight)	1.87 Lbs (0.85 kg)		
Hose Packaging UPC	750377119897	750377119910	750377119934
Shipping Box Size (H x W x D)	16" x 14" x 14.5" (41 x 36 x 37 cm)		
Quantity Of 3 Packs/Shipping Box	15		
Shipping Box Weight	30.9 Lb (22 kg)		
Shipping Box UPC	17503771198971	17503771199107	17503771199343
Pallet Size (H x W x D)	49" x 40" x 48" (1.25 x 1.01 x 1.21m)		
Quantity Of Shipping Boxes/Pallet	18		
Pallet Weight (Including Shipping Boxes)	556 Lb (252 Kg)		
North American HTS Code	40091100		
Product Warranty	1 Year		