

# Si-20

**Test Equipment Depot**  
1-800-517-8431

99 Washington Street  
Melrose, MA 02176  
Phone 781-665-1400  
Toll Free 1-800-517-8431

Visit us at [www.TestEquipmentDepot.com](http://www.TestEquipmentDepot.com)

## Mini condensate removal pump

Slim design for a quick install inside the air conditioning unit.

### SUITABLE FOR

- Up to 5.5 tons
- Wall mounted
- Ducted units
- Suspended ceiling units
- Floor mounted units

### PERFORMANCE

- 5 gph max. flow
- 33' max. discharge



### Key features

- Slim design
- Incredibly quiet
- Rubber dampers
- Drain safe device

## Si-20 tech specs

MAX. FLOW RATE: 5.0 gph

MAX. SUCTION HEAD: 10ft

MAX. DISCHARGE HEAD: 33ft; flow rate = 1 gph

MAX. PRESSURE: 46ft; flow rate = 0 gph

SOUND LEVEL AT 3.3FT: 22 dBA according to EN ISO 3744 (Measured at LNE lab, pump operating with water, out of application)

POWER SUPPLY: 120 V ~ 60 Hz - 14 W (SI20UL01UN12)  
230 V ~ 50/60 Hz - 14 W (SI20UL01UN23)

INSULATION CLASS: Double Insulation

DETECTION LEVELS: On:  $\frac{5}{16}$ " • Off:  $\frac{7}{16}$ " • Safety:  $\frac{3}{4}$ "

SAFETY SWITCH: NC 8A resistive - 250 V

THERMAL PROTECTION: 240°F auto-reset

OPERATING CONDITIONS: 120V - 50%: 3s ON - 3s OFF  
230V - 60%: 3s ON - 2s OFF

PUMP DIMENSIONS: L 5 $\frac{3}{8}$ " x W 1 $\frac{1}{2}$ " x H 1 $\frac{1}{2}$ "

SAFETY STANDARDS: UL / CSA certified by Intertek


RoHS & WEEE DIRECTIVES: Compliant

PACKAGING: 1.1 lbs - L 6 $\frac{3}{4}$ " x W 6 $\frac{3}{8}$ " x H 2 $\frac{7}{8}$ "


MASTERPACK: 6 pieces



### Actual flow rates (GPH)

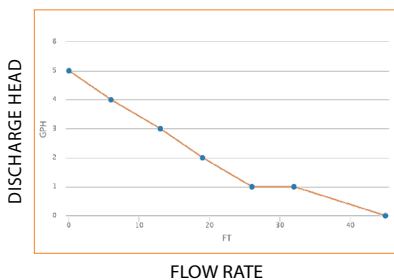

### Sound level

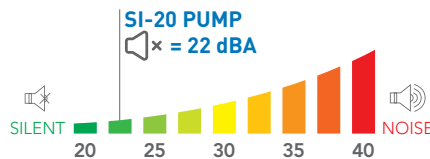

### Recommended accessories



- Clear PVC hose, 1/4" i.d.
- ACC 00105: 16ft roll
  - ACC 00150: 164ft roll



- Self-sealing fitting to connect discharge tube to drain pipe.
- 6 pcs, for 1/4" i.d.

### What's in the box



- Si-20 piston pump with clear pvc tube fitted with a pre-mounted drain safe device
- 5' power cable: 2 power wires, 2 safety contact wires
- Clear PVC tubing, 2' with foam
- Anti-vibration rubber damper
- Detection unit - Si2958, 2' cable
- Detection unit installation kit:
  - Rubber elbow
  - Vent tube
  - Split connector
  - Mounting rail
  - Adhesive
  - 3 double wire clamps
  - 3 tie wraps