


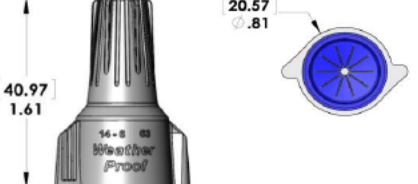


		<b>MODELS 61<sup>®</sup>, 62<sup>®</sup>, 63<sup>®</sup></b>		<b>WEATHERPROOF WIRE CONNECTORS</b>	
<b>FEATURES/BENEFITS:</b>					
		<ul style="list-style-type: none"> <li>- EASY TO APPLY, PRE-FILLED TWIST-ON WIRE CONNECTORS</li> <li>- SILICONE-BASED SEALANT PROTECTS AGAINST MOISTURE AND CORROSION</li> <li>- UL LISTED TO 486G SEALED TWIST-ON WIRE CONNECTOR</li> <li>-FOR INTERIOR AND EXTERIOR DAMP/WET LOCATIONS</li> <li>- WIDE WIRE RANGE ENABLES USE ON VARIETY OF APPLICATIONS INCLUDING OUTDOOR POWER OUTLETS, OUTDOOR SIGNAGE, AND EXTERIOR AREA LIGHTING</li> </ul>			
<b>ELECTRICAL:</b>			<b>APPLICATION TOOLING:</b>		
VOLTAGE: GENERAL: 600 V MAX SIGNS/LUMINAIRES: 1000 V MAX			- Spin-Twist <sup>®</sup> Wire Connector Socket		
<b>PHYSICAL:</b>			<b>STANDARDS &amp; SPECIFICATIONS:</b>		
HOUSING: THERMOPLASTIC POLYESTER INSERT: STEEL PLATING: ZINC TEMPERATURE: 105 C (221 F) SEALANT: 100% SILICONE			UL 486C UL 486G SEALED TWIST-ON WIRE CONNECTOR UL 94V-2 FLAME RATING CSA- C22.2 NO. 188 CSA- C22.2 NO. 198.2 DAMP & WET LOCATIONS RoHS COMPLIANT IEC 998-2-4 IP 68 TESTED		
<b>WIRE RANGE:</b>					
- Solid and/or stranded wire combinations unless stated otherwise - Consult factory for other combinations not listed					
<b>MODEL 61<sup>®</sup> (GRAY/ORANGE)</b>		<b>MODEL 62<sup>®</sup> (GRAY/RED)</b>		<b>MODEL 63<sup>®</sup> (GRAY/DARK BLUE)</b>	
STRIP LENGTH: 3/8" (9,5mm)		STRIP LENGTH: 5/8" (15,9mm)		STRIP LENGTH: 5/8" (15,9mm)	
1 or 2 #14 2 #16 1 to 4 # 18 Str. 2 to 4 #18 Sol. 2 to 4 #20		1 or 2 #10 1 to 4 #12 Sol. 1 to 3 #12 1 to 5 #14 1 to 6 #16 2 to 6 #18		1 or 2 #8 2 to 5 #10 2 to 6 #12 1 to 3 #14	
<b>DIMENSIONS:</b>					
 <p>Model 61<sup>®</sup></p>		 <p>Model 62<sup>®</sup></p>		 <p>Model 63<sup>®</sup></p>	
<b>ORDERING INFO:</b>					
CATALOG # 30-1361 30-1362 30-1363	MODEL 61 <sup>®</sup> 62 <sup>®</sup> 63 <sup>®</sup>	COLOR: Gray/Orange Gray/Red Gray/Dark Blue	PACKAGE TYPE: Box of 1,000 Box of 1,000 Box of 1,000	WEIGHT LBS (KG): 5.3 (2.4) 12.3 (5.6) 17.9 (8.1)	